

140SC












TECHNICAL DATA SHEET





 **MANITOU**

www.manitou.com

140SC

		140 SC
	Working height	14.20 m
	Platform height	12.20 m
	Capacity	363 kg
	Number of persons (indoor/outdoor)	3/2
	Basket (width and length)	2.79 x 1.60 m
	1. Overall width	1.75 m
	2. Overall length	3.76 m
	3. Overall height	2.74 m
	4. Overall length (with extension)	4.61 m
	5. Overall height when folded	2.08 m
	6. Ground clearance	0.24 m
	7. Wheelbase	2.29 m
	Inside turning circle	2.11 m
	Outside turning circle	4.60 m
	Speed of forward movement	5.6 kph
	Working speed	0.5 kph
	Lifting/Lowering time of ascent/descent	69/46 secs
	Maximum slope accessible	35%
	Tyres	26 x 12 x 380
	Driving wheels	4
	Steering/directional wheels	2
	Weight (varies according to options & standards of the country)	5039 kg
	Engine	KUBOTA D1105
	Power	25 HP
	Environmental noise (LWA)	105 dB

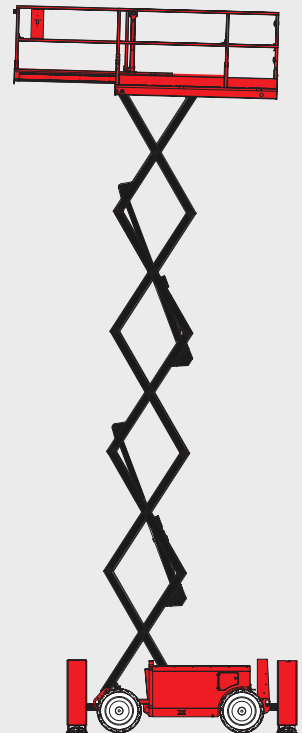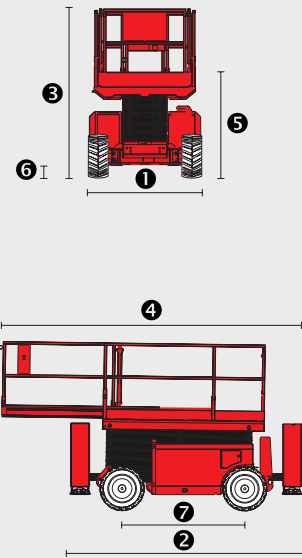

Standard equipment

- Oscillating front axle
- Proportional levers
- Outriggers with automatic levelling
- Anti slip protection
- Access gate for platform
- Folding guardrails
- Removable control box
- Audible and visual display alarm for excessive slope
- Descent Alarm
- Flashing lights
- Foam filled tyres
- On Board Diagnostics
- Hour meter
- Horn
- Beacon
- Audible and visual display alarm for excessive slope
- Predisposition 230V

Optional equipment

- Predisposition compressed air
- Predisposition of water
- Working light
- Biodegradable oil
- Warning Alarm for all movements
- Non Marking tyres
- Certificate of verification
- Safety harness